

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number
WO 2005/032731 A1

(51) International Patent Classification⁷: **B06B 1/16**

(21) International Application Number:
PCT/GB2004/004157

(22) International Filing Date:
30 September 2004 (30.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0323174.3 3 October 2003 (03.10.2003) GB

(71) Applicant and

(72) Inventor: O'CONNOR, Joe [GB/GB]; 18 Cregglea,
Clandy, Co. Londonderry BT47 4HU (GB).

(74) Agent: MURGITROYD & COMPANY; Scotland
House, 165-169 Scotland Street, Glasgow G5 8PL (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guide-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: VARIABLE VIBRATOR MECHANISM

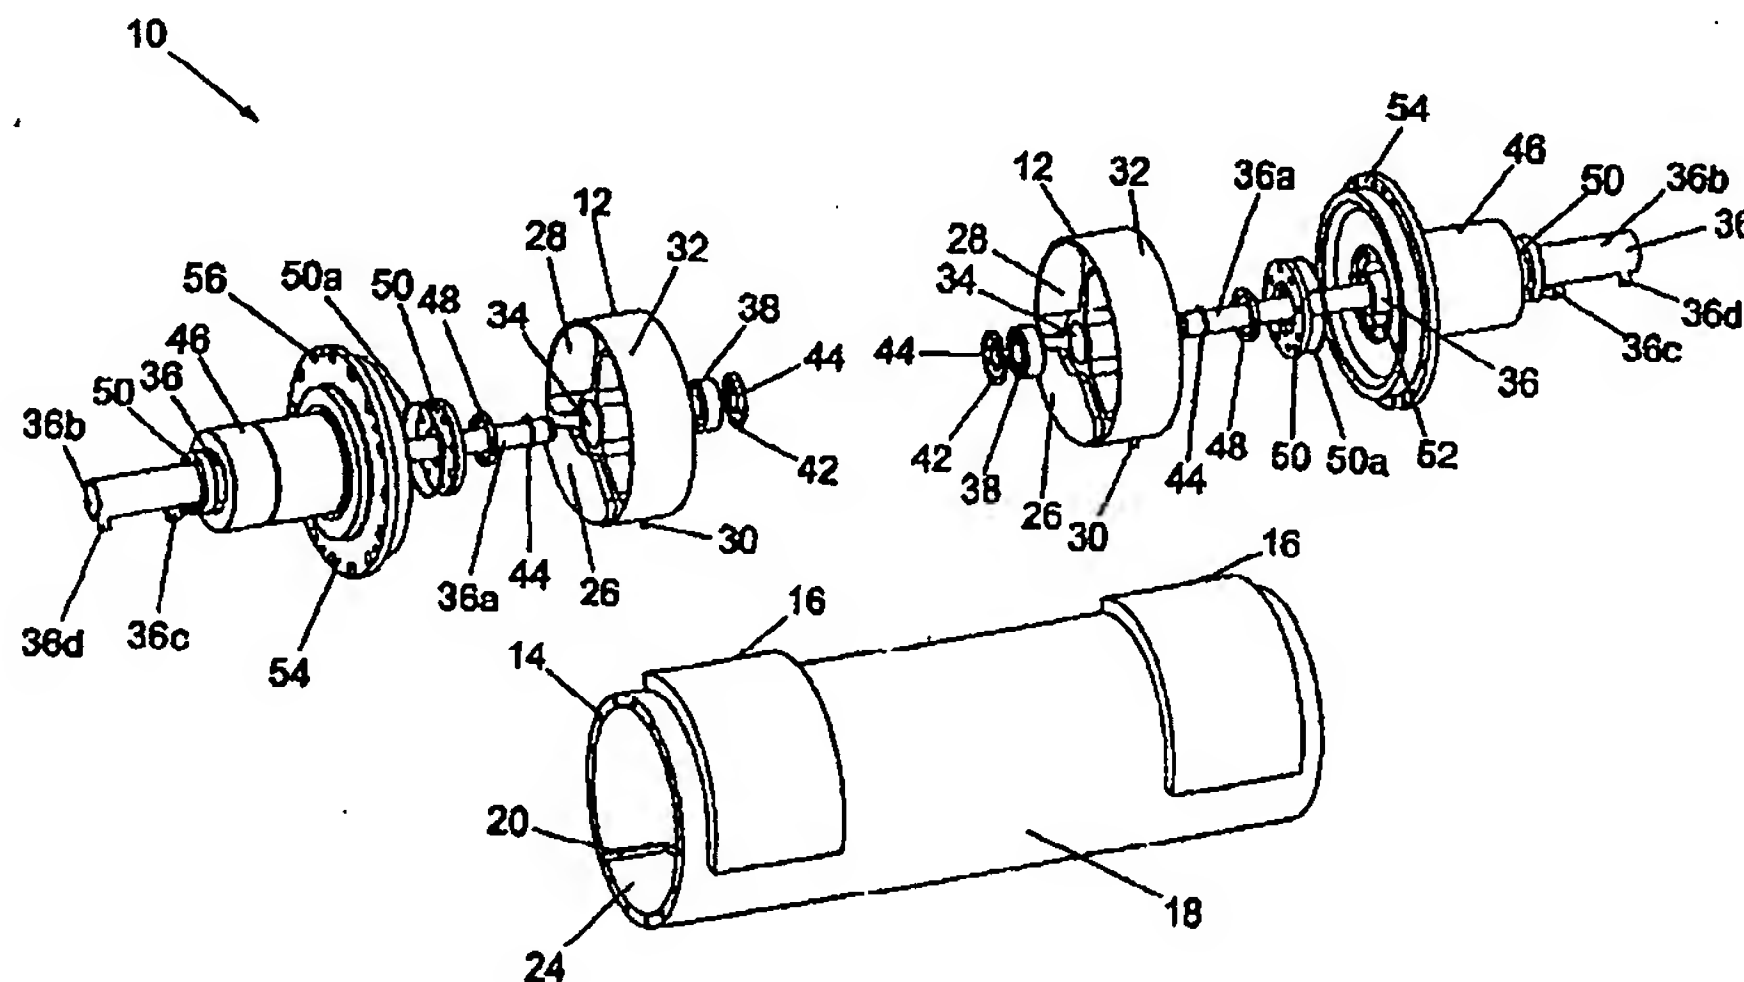

(57) Abstract: A variable vibrator mechanism (10) for feeder machines. The vibrator mechanism (10) includes a first member (12) and a second member (14) arranged telescopically with one another. The first member (12) and second member (14) have eccentric weights (axially offset) (16, 26), and are adapted such that the rotational displacement between the eccentric weights (16, 26) is varied by varying the longitudinal displacement between the first and second member (12, 14). Thus allowing the vibrational characteristics of the vibrator to be adjusted by simply varying the displacement between the first and second members (12, 14).

WO 2005/032731 A1